


24" I.D.Ø (round) or 30"
 I.D.Ø (round or square)

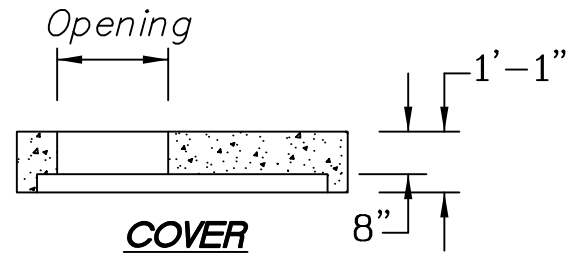

SPECIFICATIONS:

- Concrete: 4000 psi @ 28 days
- Reinforcement: ASTM A615-Grade 60 (Rebar)
- Entrained Air: 5.5-9.5%
- Concrete & Reinforcement as per ASTM C478
- Manufactured to meet or exceed H20 loading

**GUARDIAN CONCRETE
 PRODUCTS INC.**
 2140 Maxon Rd.
 Schenectady, NY 12308
 Fax (518) 372-6729

**5'-0" I.D.
 MANHOLE SECTIONS**

SCALE: NOT TO SCALE	DATE: MARCH 28, 2007
TELEPHONE NO.: (518) 372-0080	JOB: GENERAL CATALOG DRAWING